


BRAD-PERF-25/50

A062_0521

Clean, dry spray and breathing air supply

Features & Benefits

- Consistent less than -40°F dew point to the gun
- Delivers perfectly clean, dry air for flawless finishes every time
- Has the most activated carbon of any competitive breathing/paint air system on the market
- Engineered for use with all paint spray guns (not included), especially HVLP guns
- Supplies Grade D Breathing Air
- BRAD-PERF-25C for single gun spraying; BRAD-PERF-50C for two gun spraying booths
- Regenerative desiccant beads require little maintenance
- Monitor design is directly inline with the air flow ensuring consistent, safe monitoring
- Self calibrating monitor w/audible alarm
- Monitor displays actual CO levels & alarms at 10ppm of CO

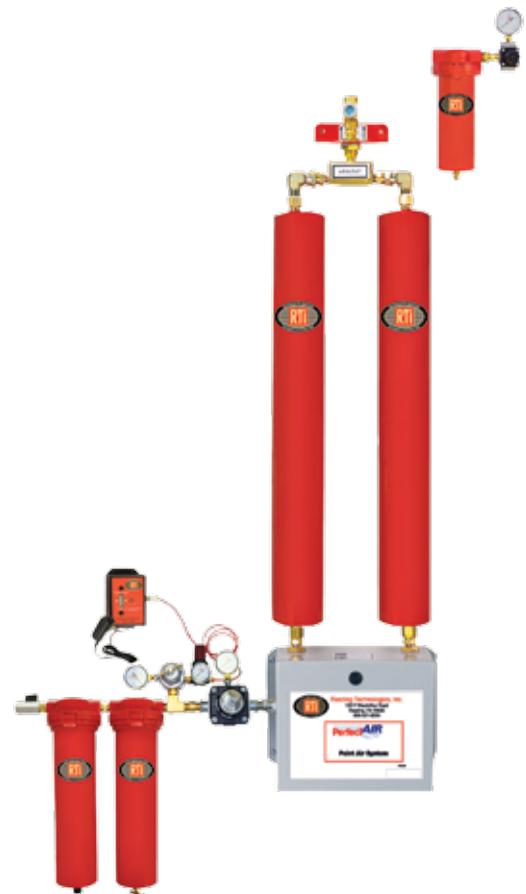

BRAD-PERF-50C

You Pick The Operator Kit:

(sold separately)

Optional Operator's Kit for Painter



BRAD-OK

Optional Operator's Kit for Painter



BRAD-OK-M2C-50

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe



	BRAD-PERF-25C Breakdown	BRAD-PERF-50C Breakdown
RTi Patented 2 Stage Pre-Filters with CO Monitor	<p>BRAD-PC2C</p>  <ul style="list-style-type: none"> • 60/150 SCFM at 100 PSI • 1/2" ball valve inlet • Auto drain 1st stage • Capacity: <ul style="list-style-type: none"> 1st stage - 1 micron 2nd stage - 0.01 micron at 99.9998% efficiency <p>Both 25 & 50 Models Utilize the BRAD-PC2C</p>	<ul style="list-style-type: none"> • Power Pack with battery Back-up supplied with monitor • Replacement Elements: <ul style="list-style-type: none"> 1st stage: DE362C 2nd stage: 3C-151
Desiccant Dryer	<p>ARAD-25</p>  <ul style="list-style-type: none"> • Regenerative desiccant dryer uses dry air purge to recondition desiccant bed • Up to 25 SCFM at 100 PSI • -40°F dew point • 3/8" Inlet/outlet • Inlet flow: 29 SCFM max • Moisture indicator at outlet • Uses < 0.1 Amps • Fused overload protection • 110 Vac w/ 5' power cord • NEMA 4 enclosure • Easy wall mount design • Quiet operation • Aluminum towers - no rust 	<p>ARAD-50</p>  <ul style="list-style-type: none"> • Regenerative desiccant dryer uses dry air purge to recondition desiccant bed • Up to 50 SCFM at 100 PSI • -40°F dew point • 3/8" Inlet/outlet • Inlet flow: 54 SCFM max • Moisture indicator at outlet • Uses < 0.1 Amps • Fused overload protection • 110 Vac w/ 5' power cord • NEMA 4 enclosure • Easy wall mount design • Quiet operation • Aluminum towers - no rust
After Filter & Accessories	<p>PERF-25-AF</p>  <p>Note: Regulator & gauge sold separately when ordering "-AF", but is included in "PERF-25"/"PERF-50" complete package</p> <ul style="list-style-type: none"> • 60 SCFM at 100 PSI • 1/2" Inlet/Outlet • Capacity - .01 micron @ 99.9998% efficiency • Eliminates desiccant dust contamination of paint • Manual petcock drain • 3/8" High Flow Regulator with Gauge. Part #: RG30 	<p>PERF-50-AF</p>  <ul style="list-style-type: none"> • 60 SCFM at 100 PSI • 1/2" Inlet/Outlet • Capacity - .01 micron @ 99.9998% efficiency • Eliminates desiccant dust contamination of paint • Manual petcock drain • 1/2" High Flow Regulator with Gauge. Part #: NAR4000-N04 and PG-160



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov/product

